



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

11
B.D.
10/31/03



Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

99120799.4

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN
THE HAGUE,
LA HAYE, LE

05/09/00

This Page Blank (uspto)



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

**Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation**

Anmeldung Nr.:
Application no.: 99120799.4
Demande n°:

Anmeldetag:
Date of filing: 20/10/99
Date de dépôt:

Anmelder:
Applicant(s):
Demandeur(s):
Sony International (Europe) GmbH
10785 Berlin
GERMANY

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:
Method and device to retrieve RDS information

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:

H04H1/00, H04B1/16

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE
Etats contractants désignés lors du dépôt:

Bemerkungen:
Remarks:
Remarques:

The address of the applicant at the time of filing of the application
reads as follows : D-50829 Köln

This Page Blank (uspto)

20-10-1999

EP99120799.4

DESC

MÜLLER & HOFFMANN PATENTANWÄLTE

European Patent Attorneys - European Trademark Attorneys

Innere Wiener Strasse 17
D - 81667 München

EPO - Munich
80

20. Okt. 1999

Attorney's File: 51768 Mü/sat

20.10.1999

Client's Ref.: S99P5065EP00/PAE99-043ERDS

Sony International (Europe) GmbH

Hugo-Eckener-Str. 20
D-50829 Köln

METHOD AND DEVICE TO RETRIEVE RDS INFORMATION

MÜLLER & HOFFMANN

- 2 -

Sony International (Europe) GmbH

51768

20.10.1999

EPO - Munich
60

Description

20. Okt. 1999

- 1 The present invention relates to the demodulation of radio data system (RDS) signals, in particular to a method to retrieve RDS information according to the pre-characterizing portion of claim 1 and to a RDS demodulator operating according to such a method.

5

In fm-broadcasting a stereo-multiplex signal is frequency modulated. The stereo-multiplex signal consists of a stereo-sum signal and a stereo-difference signal. The stereo-difference signal is amplitude modulated with suppressed carrier. To allow a coherent amplitude demodulation of the stereo-difference

- 10 signal at the receiver, a pilot carrier with half the AM-carrier frequency is added to the stereo-multiplex signal.

The stereo-sum signal and the stereo-difference signal are defined by

15

$$m_s(t) = a_l(t) + a_r(t)$$

$$m_d(t) = a_l(t) - a_r(t)$$

wherein $a_l(t)$ is the signal of the left audio channel and $a_r(t)$ is the signal of the right audio channel.

20

The stereo-multiplex signal is defined by

$$m_{stmux}(t) = m_s(t) + \sin(2\omega_{pil}t) \cdot m_d(t) + A_{pil} \cdot \sin(\omega_{pil}t)$$

- 25 wherein ω_{pil} is the carrier frequency and A_{pil} is the amplitude of the carrier.

The RDS-signal is added to the stereo-multiplex signal by modulating the in-phase or in quadrature component of the 3rd harmonic of the pilot carrier. Therefore, the multiplex signal is defined by:

30

$$m(t) = m_{stmux}(t) + \cos(3\omega_{pil}t) \cdot m_{rds}(t)$$

wherein $m_{rds}(t)$ is the RDS-signal.

Fig. 8 shows the basic functionality of a stereo-demultiplexer according to the

- 1 prior art. Since the 2nd harmonic of the pilot carrier is required for the coherent amplitude demodulation of the stereo-difference signal, the stereo-demultiplexer needs to recover this 2nd harmonic of the pilot carrier to perform the stereo-demultiplexing. Therefore, a PLL-circuit 1 receives the multiplex signal
- 5 $m(t)$ locks to the pilot carrier and generates the 2nd harmonic of the pilot carrier, i.e. a signal $2\sin(2\omega_{pil}t)$. For the coherent amplitude demodulation of the stereo-difference signal a low phase error between pilot carrier and the 2nd harmonic of the pilot carrier is required. This coherent amplitude demodulation is performed by way of a first mixer 2 which receives the multiplex signal
- 10 $m(t)$ at its first input and the 2nd harmonic of the pilot carrier at its second input. The output signal of the demodulator 2 is input to a filter 3 which outputs the stereo-difference signal $m_d(t)$. The stereo-sum signal $m_s(t)$ is generated by a lowpass filtering of the multiplex signal $m(t)$ with a lowpass filter 4.
- 15 The left and right audio signals $l(t)$ and $r(t)$ are calculated by addition and subtraction of the stereo-sum signal and the stereo-difference signal:

$$r(t) = m_s(t) - m_d(t) = (a_l(t) + a_r(t)) - (a_l(t) - a_r(t)) = 2a_r(t)$$

20
$$l(t) = m_s(t) + m_d(t) = (a_l(t) + a_r(t)) + (a_l(t) - a_r(t)) = 2a_l(t)$$

- The left audio signal $l(t)$ is generated by an adder 35 which receives the stereo-difference signal $m_d(t)$ at its first input and the stereo-sum signal $m_s(t)$ at its second input. The right audio signal $r(t)$ is generated by a subtractor 36 which
- 25 receives the stereo-sum signal $m_s(t)$ as minuend at its first input and the stereo-difference signal $m_d(t)$ as subtrahend at its second input.

- The RDS-signal is coherent amplitude demodulated by multiplying the multiplex signal $m(t)$ with the 3rd harmonic of the pilot carrier, i.e. a 57 kHz carrier
- 30 in systems which use the frequency 19 kHz as carrier frequency. Therefore, the 3rd harmonic of the pilot carrier is extracted from the multiplex signal $m(t)$ by filtering said signal with a bandpass filter 33 which has a center frequency of 57 kHz. The output signal of the bandpass filter 33 is input to a COSTAS-loop circuit 34 which locks to the amplitude modulated RDS signal to recover the
- 35 RDS-carrier, i.e. the 3rd harmonic of the pilot carrier. The recovered RDS-carrier is multiplied with the output signal of the bandpass filter 33 by a second mixer 9 to demodulate the RDS-signal. With this multiplication and a following

MÜLLER & HOFFMANN

- 4 -

Sony International (Europe) GmbH

51768

20.10.1999

1 lowpass filtering by a lowpass filter 10 the coherent amplitude demodulation of the RDS-signal is performed. The output signal of the lowpass filter 10 is fed to a RDS-decoder 11 which decodes the RDS-signal $m_{rds}(t)$ and outputs the RDS-data.

5

For the detection of a stereo transmitter the stereo-demultiplexer needs to detect the pilot carrier. A reliable method for the detection of the pilot carrier is to perform a coherent amplitude demodulation of the multiplex signal $m(t)$ with the pilot carrier. Therefore, the PLL-circuit 1 generates a carrier with a carrier frequency ω_{pil} that is in phase to the pilot carrier. This carrier is mixed with the multiplex signal by a third mixer 12 and the output signal of the third mixer 12 $m_g(t)$ is lowpass filtered by a lowpass filter 13 to suppress mixing products with a higher frequency. The so generated DC-signal $m_h(t)$ is a reliable information for the detection of stereo transmission.

15

This described stereo-demultiplexer has the particular disadvantage that it needs a quite high calculation power in a digital solution, especially since a carrier with the frequency of the 3rd harmonic of the pilot carrier, i.e. 57 kHz, has to be generated.

20

Therefore, it is the object of the present invention to provide a method for stereo-demultiplexing and RDS-demodulation needing less calculation power and a stereo-demultiplexer including a RDS-demodulator working according to said method, i.e. needing less calculation power.

25

The inventive method is defined in independent claim 1 and the stereo-demultiplexer according to the present invention is defined in independent claim 13. Preferred embodiments of the inventive method are defined in dependent claims 2 to 12.

30

The present invention and its embodiments will be better understood from the following detailed description of exemplary embodiments thereof taken in conjunction with the accompanying drawings, wherein

35 **Fig. 1** shows a stereo-demultiplexer according to a first preferred embodiment of the present invention;

MÜLLER & HOFFMANN

- 5 -

Sony International (Europe) GmbH

51768

20.10.1999

- 1 **Fig. 2** shows the spectrum of the input signal and the output signal of the first mixer 2 shown in Fig. 1;
- 5 **Fig. 3** shows the spectrum of the input signal and the output signal of the second mixer 5 shown in Fig. 1;
- Fig. 4** shows the spectrum of the input signals and the output signal of the subtractor 6 shown in Fig. 1;
- 10 **Fig. 5** shows a possible digital realization of a stereo-demultiplexer according to the prior art;
- Fig. 6** shows a stereo-demultiplexer according to a second preferred embodiment of the present invention;
- 15 **Fig. 7** shows a stereo-demultiplexer according to a fourth preferred embodiment of the present invention; and
- Fig. 8** shows a stereo-demultiplexer according to the prior art.

20

According to a first aspect of the present invention the coherent amplitude demodulation of the RDS-signal is performed without the generation of an additional carrier with the frequency of the 3rd harmonic of the pilot carrier, i.e. without an additional 57 kHz carrier. Therefore, the present inventions

25 achieves big advantages in terms of calculation power saving.

In the following the first aspect of the present invention will be explained on the basis of Fig. 1 to 4 which show a first preferred embodiment according to the present invention. For the sake of simplicity the shown multiplex signal

30 $m(t)$ contains only the signals relevant for the present invention, i.e. the amplitude modulated RDS-signal and the pilot carrier. The demultiplexing and demodulation of the left and right audio signals is exactly performed like in the stereo-demultiplexer according to the prior art shown in Fig. 8. Also, the detection of a stereo transmitter is performed in a similar way. Therefore, the de-

35 scription of these parts of the stereo-demultiplexer according to the present invention which is shown in Fig. 1 is omitted.

1 During the generation of the stereo-difference signal $m_d(t)$ an intermediate signal $m_a(t)$ is generated as output signal of the first mixer 2 which is input into the lowpass filter 3, i.e. the intermediate signal equals to the multiplex signal $m(t)$ multiplied with the 2nd harmonic of the pilot carrier (multiplied with the
5 38 kHz carrier). Therefore, in the intermediate signal the RDS-carrier is mixed from the 3rd harmonic of the pilot carrier to the frequency of the pilot carrier, i.e. from 57 kHz to 19 kHz. The pilot carrier itself is mixed from 19 kHz to -19 kHz, i.e. it is mirrored. Fig. 2 shows the spectrum $M(jf)$ of the multiplex signal $m(t)$ on its left hand side and the spectrum of the output of the first mixer 2,
10 i.e. the spectrum $M_a(jf)$ of the intermediate signal $m_a(t)$ on its right hand side. As mentioned above, only the signals relevant for the present invention are shown. It can be seen that the spectrum $M_a(jf)$ of the intermediate signal $m_a(t)$ at 19 kHz consists of a mirrored pilot carrier and the frequency shifted amplitude modulated RDS-signal.

15

To properly extract the amplitude modulated RDS-signal from the intermediate signal $m_a(t)$, according to the first preferred embodiment of the present invention, the mirrored pilot carrier needs to be subtracted from the intermediate signal $m_a(t)$. To mirror the pilot carrier the stereo-sum signal $m_s(t)$ is multiplied with the 2nd harmonic of the pilot carrier, i.e. with the 38 kHz carrier by
20 a fourth mixer 5.

25

Fig. 3 shows the spectrum $M_s(jf)$ of the stereo-sum signal $m_s(t)$ at the left hand side and the spectrum $M_b(jf)$ of the mirrored pilot carrier at its right hand side.

Fig. 4 shows the subtraction of the mirrored pilot carrier $m_b(t)$ from the intermediate signal $m_a(t)$ which is performed by way of a subtractor 6. The left hand side of Fig. 4 shows the spectrum $M_a(jf)$ of the intermediate signal $m_a(t)$ from which the spectrum $M_b(jf)$ of the mirrored pilot carrier $m_b(t)$, which is
30 shown in the middle of Fig. 4, is subtracted to gain the spectrum $M_c(jf)$ of the amplitude modulated RDS-signal which is shown at the right hand side of Fig. 4.

Fig. 1 shows that the so generated amplitude modulated RDS-signal that has
35 now a carrier frequency of 19 kHz (a carrier frequency according to the pilot carrier) is processed like in the prior art RDS-demodulator shown in Fig. 8. The only difference is that the center frequency of the bandpass filter 33

MÜLLER & HOFFMANN

- 7 -

Sony International (Europe) GmbH

51768

20.10.1999

1 shown in Fig. 8 is changed to the frequency of the pilot carrier, i.e. 19 kHz in
the bandpass filter 7 shown in Fig. 1 which receives the output signal of the
subjector 6 and that the carrier frequency of the COSTAS-loop circuit 34
shown in Fig. 8 is changed from the 3rd harmonic of the carrier frequency to
5 the carrier frequency, i.e. from 57 kHz to 19 kHz, in the COSTAS-loop circuit 8
shown in Fig. 1 which receives the output signal of the bandpass filter 7 and
feeds its carrier having the frequency of the pilot carrier to the second mixer 9
that demodulates said output signal of the bandpass filter 7 by multiplying
with the output signal of the COSTAS-loop circuit 8.

10

Fig. 5 shows a possible digital solution of the prior art stereo-demultiplexer and
RDS decoder shown in Fig. 8 which elucidates a sampling rate decimation.
Such a sampling rate decimation can be performed, because the frequency
modulated multiplex signal $m(t)$ has a much higher bandwidth than the fre-
15 quency demodulated and stereo-demultiplexed audio signal and the RDS sig-
nal. The combination of the present invention with the digital stereo-demulti-
plexer shown in Fig. 5 has the advantage of a very low calculation power. For a
better understanding, first this digital stereo-demultiplexer is described with-
out the application of the present invention.

20

As it is shown in Fig. 5, the stereo-sum signal $m_s(t)$ is generated from the mul-
tiplex signal $m(t)$ by a sampling rate decimation with a decimation factor D by
a first sampling rate decimation filter 14 and a following lowpass filtering with
a lowpass filter 15. The so generated stereo-sum signal $m_s(t)$ is thereafter de-
25 layed by a first delay element with a delay of τ to equalize the group delay of a
second sampling rate decimation filter 21 in the difference path.

Furtheron, a digital PLL circuit 37 (which replaces the PLL circuit 1 of the first
preferred embodiment according to the present invention) is working with the
30 decimated sampling rate. Therefore, the decimation filtering of the sum path,
i.e. the path to generate the stereo-sum signal $m_s(t)$ is used for the sampling
rate decimation of the stereo-sum signal $m_s(t)$ and the pilot carrier, i.e. the
output signal of the first sampling rate decimation filter 14 is not only input to
the lowpass filter 15 but also to the DPLL-circuit 37. This realization is de-
35 scribed in more detail in a parallel european patent application "digital stereo
demultiplexer" of the same applicant.

- 1 The DPLL-circuit 37 generates a carrier for the coherent amplitude demodulation of the stereo-difference signal $m_d(t)$ and a carrier for the coherent pilot carrier detection, i.e. the detection of a stereo transmitter. Within the DPLL-circuit 37 another carrier is required for synchronization purposes that is in
- 5 quadrature to the pilot carrier. Therefore, the DPLL-circuit 37 generates three carriers, i.e. the 38 kHz carrier for the coherent amplitude demodulation of the stereo-difference signal $m_d(t)$ and a complex 19 kHz carrier. The complex 19 kHz carrier consists of the carrier for the coherent pilot carrier detection and the in quadrature component of this 19 kHz carrier which is required within
- 10 the DPLL-circuit 37 for synchronization purposes.

Similar to the detection of a stereo transmitter described in connection with Fig. 8 the stereo transmitter is detected by a multiplication of the multiplex signal $m(t)$ with the pilot carrier and a following lowpass filtering. This de-

15 modulation is performed by a third mixer 31 which receives the sampling rate decimated multiplex signal from the first sampling rate decimation filter 14 and the pilot carrier generated by the DPLL-circuit 37 on basis of said sampling rate decimated multiplex signal. The output signal of the third mixer 31 is input to a lowpass filter 32 which outputs the pilot detection signal $m_h(t)$.

20

The coherent amplitude demodulation of the stereo-difference signal $m_d(t)$ needs to be performed at a sampling rate which is higher than the sampling rate of the audio signal, since the bandwidth of the multiplex signal $m(t)$ is higher than the bandwidth of the audio signal. Therefore, the carrier for the coherent amplitude demodulation of the stereo-difference signal $m_d(t)$ needs to be

25 generated with a higher sampling rate. Fig. 5 shows that the carrier is generated with a sampling rate that is D times higher than the sampling rate of the audio signal, since the second harmonic of the pilot carrier generated by the DPLL-circuit 37 is upsampled with a factor of D in a sampling rate upsampling

30 circuit 18. To perform the coherent amplitude demodulation which is necessary to generate the stereo-difference signal $m_d(t)$ the so generated carrier with a carrier frequency of $2\omega_{pi1}$ that is locked in phase to the pilot carrier is multiplied with the multiplex signal $m(t)$ by a first mixer 20. Furthermore, the output signal of the first mixer 20 is lowpass filtered by a lowpass filter 24 which out-

35 puts the stereo-difference signal $m_d(t)$. A second sampling rate decimation filter 21 decimates the sampling rate of the output signal of the first mixer 20 by a decimation factor of D before it is input to the lowpass filter 24. Fur-

1 thereon, the multiplex signal $m(t)$ needs to be delayed by a delay of τ to equalize the group delay of the first sampling rate decimation filter 14 in the sum path before it is input to the first mixer 20. This delay is achieved by a second delay element 19 arranged before the first mixer 20.

5

Within the digital stereo-demultiplexer shown in Fig. 5 the RDS data is generated by mixing the multiplex signal $m(t)$ with a complex third harmonic of the pilot carrier to the baseband with a fifth mixer 26 before the complex RDS baseband signal is sampling rate decimated by a factor F with a third sampling rate decimation filter 38, a subsequent filtering with a reconstruction lowpass filter 28 which is a matched filter for the optimal RDS decoding and a generation of the amplitude demodulated RDS-signal with the help of a COSTAS-loop circuit 29 which locks to the RDS carrier, whereafter the so generated coherent amplitude demodulated RDS-signal is fed to an RDS-decoder 30 which outputs
10 the RDS data.
15

Fig. 6 shows a second preferred embodiment according to the present invention. This second preferred embodiment makes use of the sampling rate decimation filter of the stereo-difference signal for the sampling rate decimation of
20 the RDS signal.

Therefore, the stereo-demultiplexer according to the second preferred embodiment of the present invention shown in Fig. 6 equals to the digital stereo-demultiplexer shown in Fig. 5 in the generation of the stereo transmitter detection, the stereo-sum signal $m_s(t)$ and the stereo-difference signal $m_d(t)$.
25

According to the second preferred embodiment of the present invention the RDS-signal is retrieved similar to the first preferred embodiment according to the present invention shown in Fig. 1, but on basis of sampling rate decimated signals. Therefore, the sampling rate decimated intermediate signal $m_a(t)$ which is output by the second sampling rate decimation filter 21 is input as minuend to a subtractor 25 which subtracts the mirrored pilot carrier $m_b(t)$ which is also sampling rate decimated and outputs an amplitude modulated RDS-signal $m_c(t)$. The mirrored pilot carrier $m_b(t)$ is generated by a mixing of the sampling rate decimated multiplex signal $m(t)$ which is output from the first sampling rate decimation filter 14. The bandwidth of the sampling rate decimation filter is determined so that the stereo-sum signal and the pilot carrier are in the
30
35

1 passband of the filter. This operation is performed with a fourth mixer 22
which receives the output signal of the first sampling rate decimation filter 14
and the sampling rate decimated second harmonic of the pilot carrier which is
generated by a DPLL-circuit 17 which also receives the output signal of the
5 first sampling rate decimation filter 14. This sampling rate decimated second
harmonic of the pilot carrier is also fed to the upsampling circuit 18 before it
is used for the coherent amplitude demodulation of the stereo difference signal
 $m_d(t)$. The output signal of the second modulator 22, i.e. the mirrored pilot
carrier, is delayed by a delay of τ in a third delay element 23 to equalize the
10 group delay of the second sampling rate decimation filter 21 in the difference
path before it is output as mirrored pilot carrier $m_b(t)$ and therewith as subtra-
hement to the subtractor 25. The amplitude modulated RDS-signal $m_c(t)$ is input
to a fourth mixer 26 which downconverts the amplitude modulated RDS signal
to a complex baseband signal by mixing with the complex 19 kHz carrier. As
15 mentioned above in connection with Fig. 1, this complex carrier with the fre-
quency of the pilot tone is already available in the DPLL-circuit 17, since the
in phase component thereof is needed for the stereo transmitter detection and
the in quadrature component thereof is needed for synchronization purposes
within the DPLL-circuit 17.

20

Apart from a further sampling rate decimation by a decimation factor of E in-
stead of a decimation factor F the following processing of the RDS-signal is
similar to that of the second preferred embodiment of the present invention
shown in Fig. 5. The decimation factors D, E and F have the following relation:

25

$$D + E = F$$

This digital solution of the second preferred embodiment according to the
present invention has the advantage that the amplitude modulated RDS-signal
30 is mixed to the complex baseband in combination with a sampling rate decima-
tion. Therefore, the respective processing within the COSTAS-loop, the selec-
tivity filtering and the matched filtering for the optimal decoding of the ampli-
tude modulated RDS-signal are performed at low sampling rates, as described
in connection with Fig. 5. As shown in Fig. 6, this can advantageously be
35 achieved by using the sampling rate decimation filters of the stereo-sum signal
and the stereo-difference signal for the RDS-demodulation. Additionally, all
carriers for the frequency shift of the amplitude modulated RDS-signal are

1 available from the stereo-demultiplexer. Therefore, no additional sin/cos calculations or tables are required at high sampling rates for the coherent demodulation of the amplitude modulated RDS-signal. Therefore, this embodiment has big advantages in terms of calculation power saving.

5

As mentioned above, the DPLL has only to generate three carriers, namely the 38 kHz carrier (second harmonic of the pilot carrier) for the coherent amplitude demodulation of the stereo-difference signal and a complex 19 kHz carrier (complex frequency of the pilot carrier). The 19 kHz carrier consists of the carrier for the coherent pilot carrier detection and the in quadrature component of this 19 kHz carrier that is required within the DPLL for synchronization purposes.

According to the second preferred embodiment of the present invention the noise in the band of the pilot carrier is subtracted from the output signal of the second sampling rate decimation filter 21. Therefore, as also shown in connection with the first preferred embodiment of the present invention, the pilot carrier that is included in the stereo-sum signal $m_s(t)$ is mixed with the 38 kHz carrier (second harmonic of the pilot carrier) and delayed to equalize the group delay τ of the sampling rate decimation filters. The so generated signal is subtracted from the output of the sampling rate decimation filter 21 in the stereo-difference path to delete the noise in the band of the pilot carrier.

This generated amplitude modulated RDS-signal with a carrier amplitude of 19 kHz is mixed to the complex baseband by mixing with the complex 19 kHz carrier that is already present within the stereo-demultiplexer. A complex RDS baseband signal $m_{cL}(t)$ is sampling rate decimated by a factor of E before it is fed to the reconstruction lowpass filter 28. This reconstruction lowpass filter 28 is the matched filter for the optimal RDS decoding. The COSTAS-loop circuit 29 locks to the RDS-carrier and generates the amplitude demodulated RDS-signal. The so coherent amplitude demodulated RDS-signal is fed to the RDS-decoder 30 which outputs the RDS data.

Fig. 7 shows the third preferred embodiment according to the present invention. This third preferred embodiment considers that the output signal of the second sampling rate decimation filter 21 can already be used for the RDS-decoding with only a slight performance degradation. The performance degrada-

MÜLLER & HOFFMANN

- 12 -

Sony International (Europe) GmbH

51768

20.10.1999

- 1 tion results from the additional noise in the band of the pilot carrier that is
added to the RDS-signal. Therefore, the third mixer 26 directly receives the
output signal of the second sampling rate decimation filter 21, whereafter the
RDS-signal undergoes the same processing as shown and described in conneci-
5 tion with Fig. 6. Accordingly, the third preferred embodiment of the present in-
vention shown in Fig. 7 does not comprise the fourth mixer 22, the third delay
element 23 and the subtractor 25.

It is obvious that such changes and modifications can also be applied to the
10 first preferred embodiment according to the present invention shown in Fig. 1,
i.e. that the bandpass filter 7 directly receives the intermediate signal $m_a(t)$
and the stereo-demultiplexer shown in Fig. 1 would not comprise the third
mixer 5 and the subtractor 6.

15

20

25

30

35

MÜLLER & HOFFMANN

- 13 -

Sony International (Europe) GmbH

51768 EPO-Munich
60

20.10.1999

20. Okt. 1999

Claims

1. Method to retrieve RDS information by filtering and transforming an incoming multiplex signal ($m(t)$) into an amplitude demodulated RDS signal ($m_{\text{rds}}(t)$), **characterized in that** an amplitude modulated RDS signal ($m_c(t)$) is derived on basis of an intermediate signal ($m_a(t)$) obtained during an extraction of a stereo-difference signal ($m_d(t)$) from the incoming multiplex signal ($m(t)$).
2. Method according to claim 1, **characterized in that** the intermediate signal ($m_a(t)$) is obtained by multiplying the multiplex signal ($m(t)$) with the second harmonic of a pilot carrier ($2\sin(2\omega_{\text{pil}}t)$).
3. Method according to claim 1 or 2, **characterized in that** the amplitude modulated RDS signal ($m_c(t)$) is derived by subtracting a stereo-sum signal ($m_s(t)$) multiplied by the second harmonic of a pilot carrier ($2\sin(2\omega_{\text{pil}}t)$) from the intermediate signal ($m_a(t)$).
4. Method according to claim 1 or 2, **characterized in that** the amplitude modulated RDS signal ($m_c(t)$) is set to be the intermediate signal ($m_a(t)$).
5. Method according to anyone of claims 1 to 4, **characterized by:**
- amplitude demodulation of the amplitude modulated RDS signal ($m_c(t)$);
and
- decoding the amplitude demodulated RDS signal ($m_{\text{rds}}(t)$).
6. Method according to claim 5, **characterized in that** the amplitude demodulation of the amplitude modulated RDS signal ($m_c(t)$) is performed by a coherent amplitude demodulation with a carrier which is recovered by a COSTAS-loop from the amplitude modulated RDS signal.
7. Method according to claim 5, **characterized in that** the amplitude demodulation of the amplitude modulated RDS signal ($m_c(t)$) into a RDS base-band signal ($m_{\text{cL}}(t)$) is performed by a complex demodulation.
8. Method according to claim 7, **characterized in that** the complex carrier needed for the complex demodulation is output from a digital PLL-circuit (17)

MÜLLER & HOFFMANN

- 14 -

Sony International (Europe) GmbH

51768

20.10.1999

1 for pilot carrier recovery.

9. Method according to claim 7 or 8, **characterized in that** the carrier of the RDS signal ($m_{\text{RDS}}(t)$) is recovered with a COSTAS-loop locking to the RDS baseband signal ($m_{\text{CL}}(t)$).

5

10. Method according to anyone of claims 1 to 9, **characterized in that** the intermediate signal ($m_a(t)$) is obtained on basis of a sampling rate decimated stereo-difference signal ($m_d(t)$).

10 11. Method according to anyone of claims 1 to 10, **characterized by** a sampling rate decimation to obtain carriers for the respective demodulations.

12. Method according to anyone of claims 1 to 11, **characterized by** a sampling rate decimation of the RDS baseband signal ($m_{\text{CL}}(t)$).

15

13. RDS demodulator, **characterized in that** it is adapted to operate according to the method defined in anyone of claims 1 to 12.

20

25

30

35

EPO-Munich
60

20. Okt. 1999

Figure 1

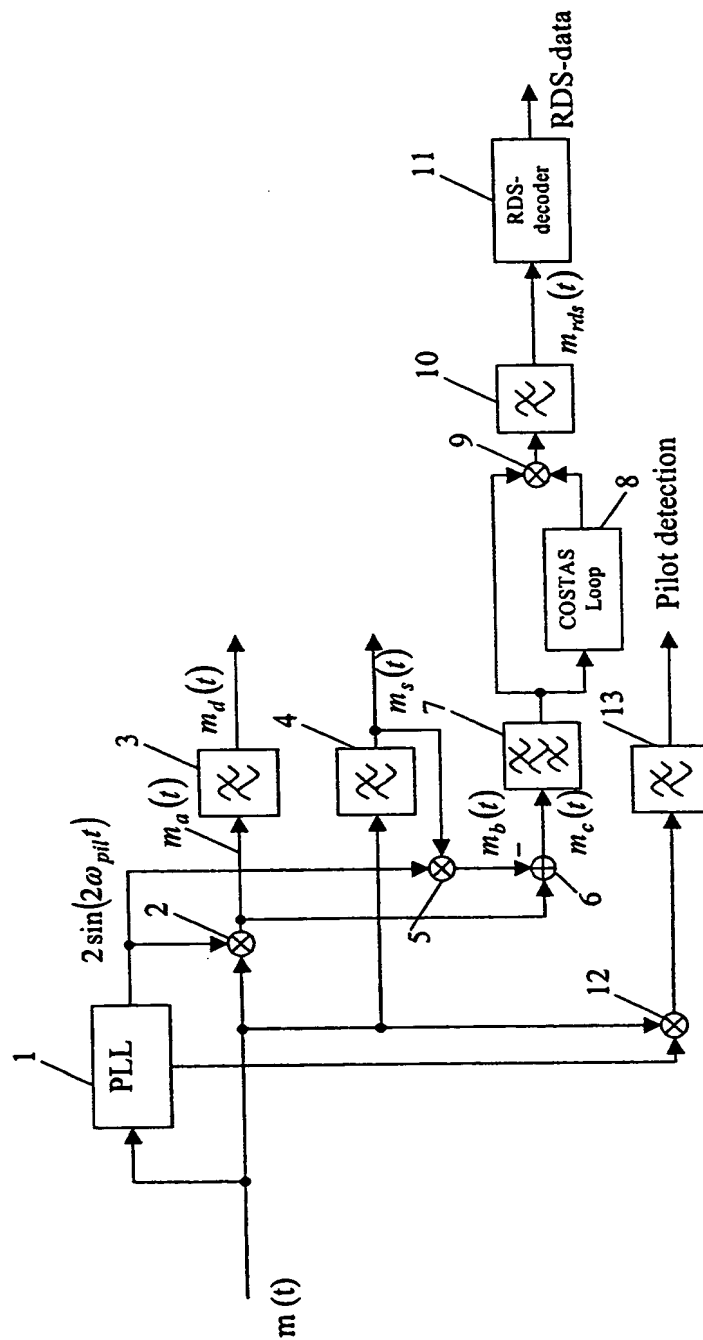


Figure 2

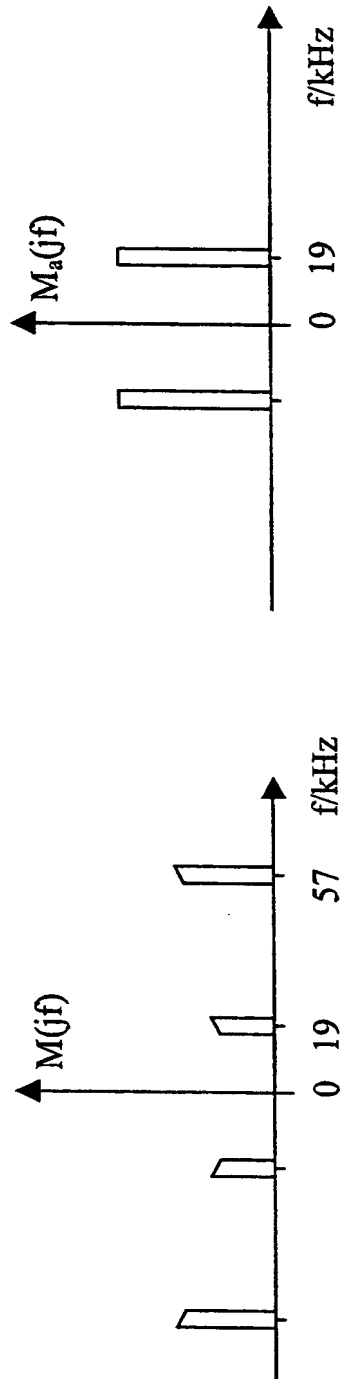


Figure 3

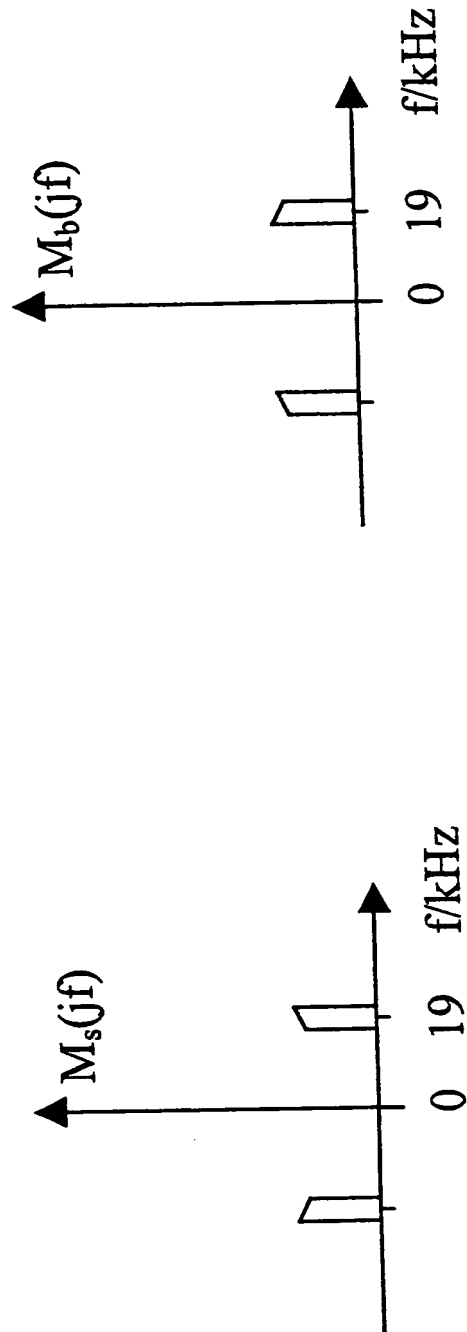


Figure 4

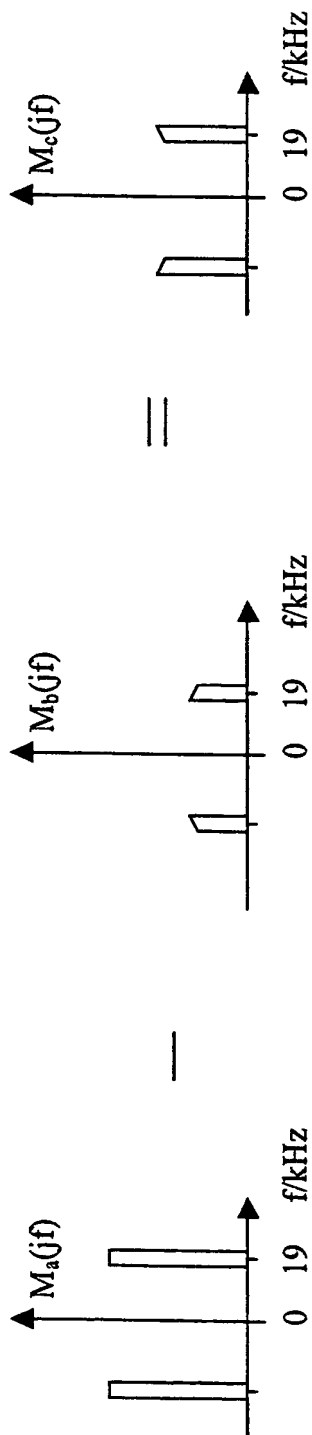


Figure 5

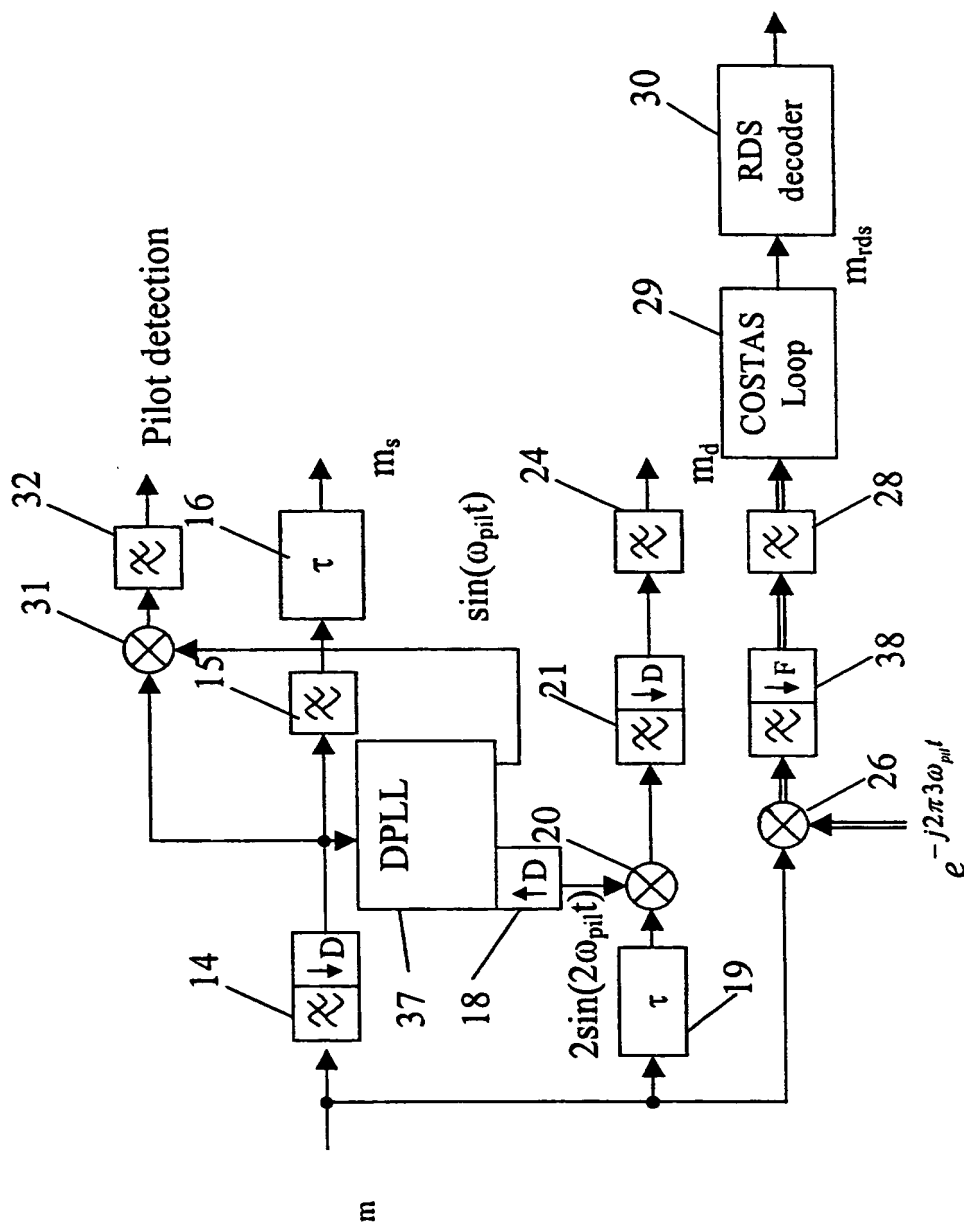


Figure 6

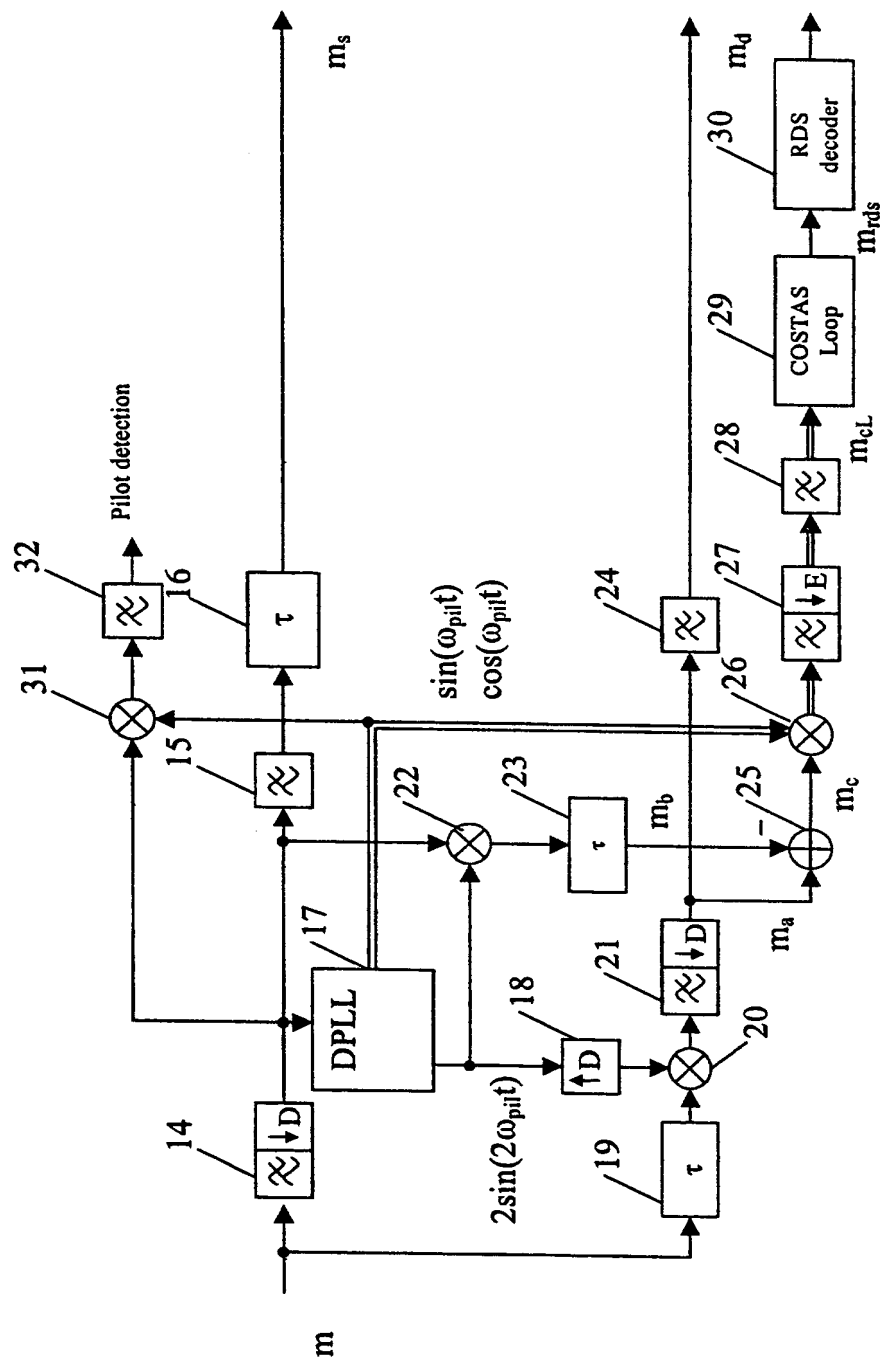


Figure 7


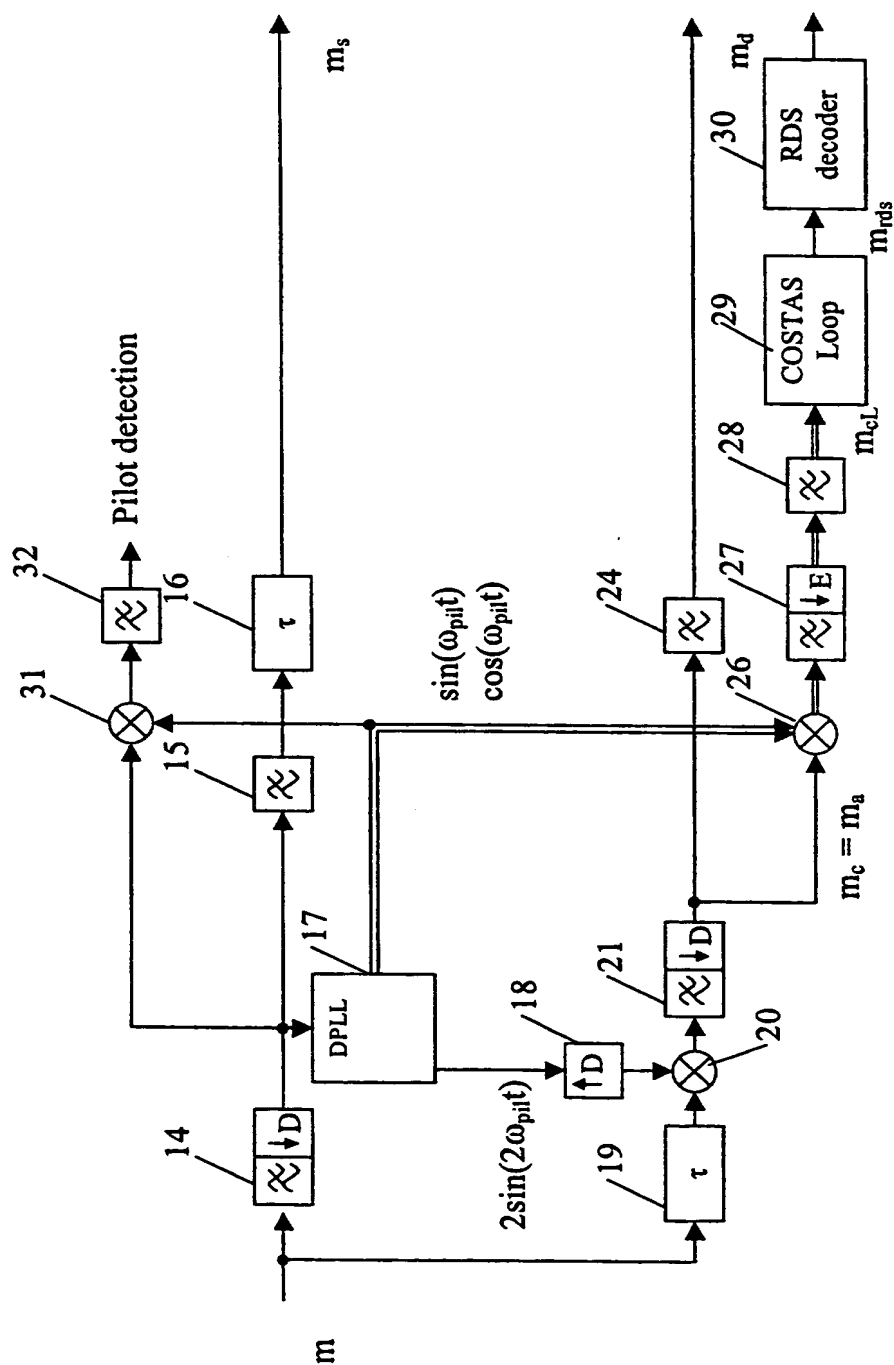


Figure 8

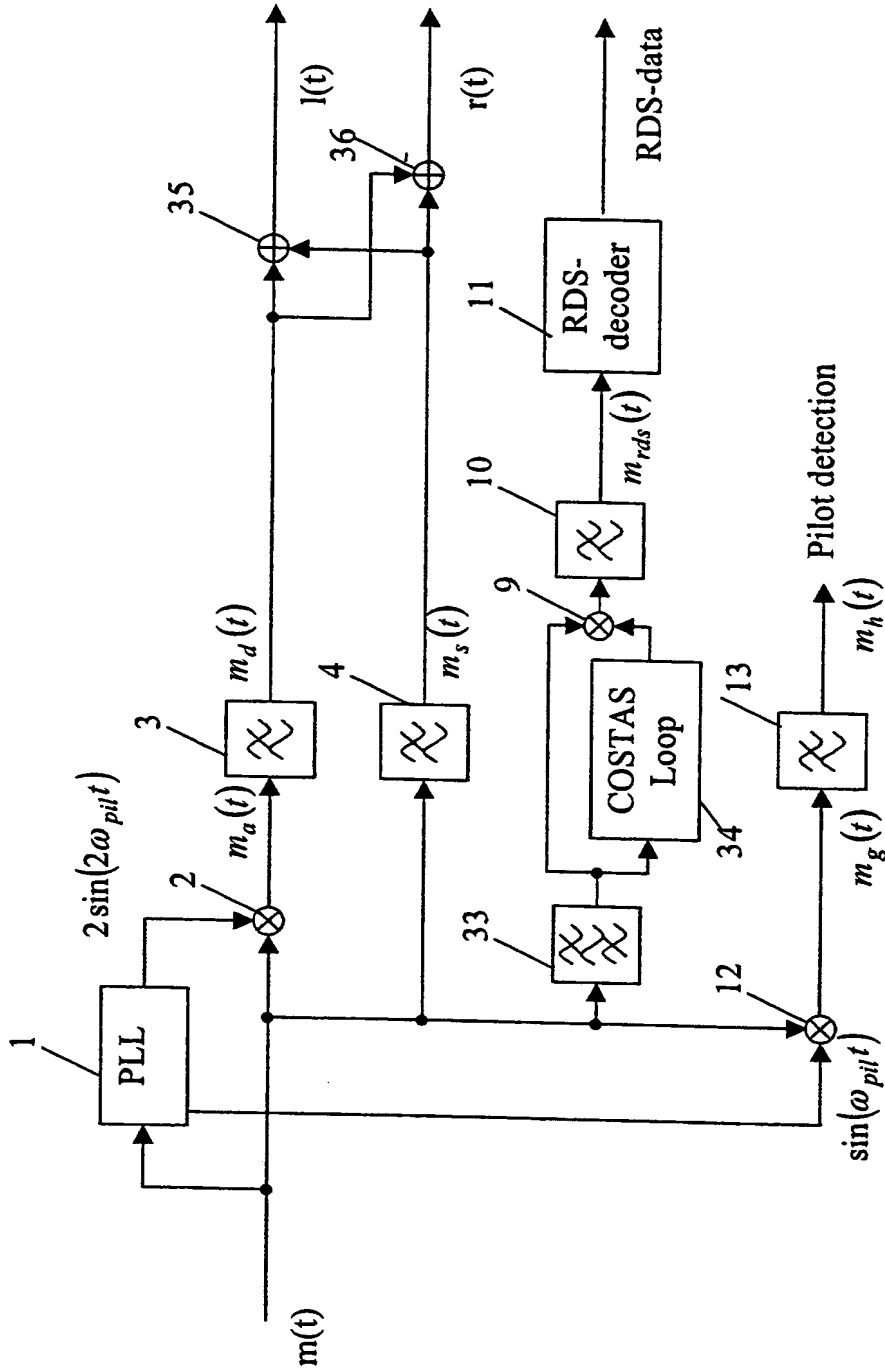

MÜLLER & HOFFMANN

- 15 -

Sony International (Europe) GmbH

51768

EPO-20.10.1999
Munich
60**Abstract**

20 Okt. 1999

Method and device to retrieve RDS information

To retrieve RDS information by filtering and transforming an incoming multiplex signal ($m(t)$) into a RDS baseband signal, an amplitude modulated RDS signal ($m_a(t)$, $m_c(t)$) is derived on basis of an intermediate signal ($m_a(t)$) obtained during an extraction of a stereo-difference signal ($m_d(t)$) from the incoming multiplex signal ($m(t)$).

(Fig. 1)

This Page Blank (uspto)